



# multi-pro XS

RESXSTD0310/001



## Technical Data Sheet



Multi-pro XS is a Medium Density Magnesium Oxide panel which has been developed to assist provide the System Build and Off-Site Construction Markets with fire rated external wall panel systems.

Multi-pro XS is tested to BS EN 594 (Racking), is A1 Non-Combustible, has a low environmental impact and provides a stable substrate to bond various finishes.


Multi-pro XS has 60/90/120 mins UKAS fire resistance testing with a single layer of board either side of stud partitions.

### EXAMPLE

#### 60 minute Fire Wall for modular construction

#### Key:

- 1 Timber Stud
- 2 Timber Floor
- 3 Plasticol coated 0.5mm steel
- 4 Window Opening
- 5 9mm Multi-pro XS
- 6 Timber Floor
- 7 RWA 45 Insulation
- 8 12mm Fireline plasterboard with COVA PVC finish

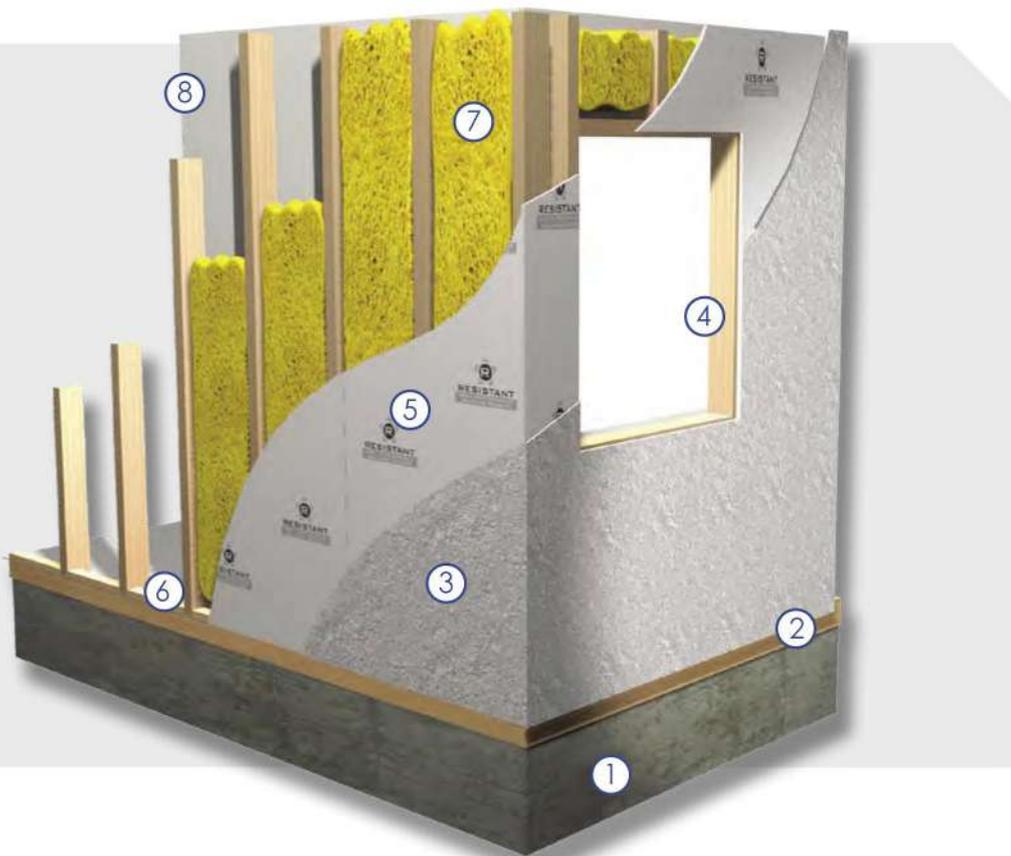

### MANUFACTURE

Resistant Multi-pro XS is manufactured using inorganic substances SiO<sub>2</sub>, CaCO<sub>3</sub>, MgO, MgCl<sub>2</sub>, and alkaline resistant fibreglass mesh.

The product is naturally cured using no energy through cold fusion unlike similar competitive products on the market which use autoclaving technology. This ensures that Resistant Multi-pro XS has a relatively low impact on the environment. Multi-pro XS achieves its superior strength and flexibility by the introduction of four layers of alkaline resistant glass fibre mesh. Consistent high quality of the product is maintained and monitored through a sophisticated digitally controlled process to ensure a superior finished board always reaches our commitment to quality assurance.

### TYPICAL USES

- Open Panel Timber/Steel Frame
- Fire Rated Modular Construction
- Sip Panels
- Park Homes Manufacturers



*multi-pro*XS

RESXSTD0310/002



## Technical Data Sheet

	Test Subject	Test	Result
Technical SPECIFICATION	Density Dry (ex works)		1050 kg/m <sup>3</sup> (+/- 10%)
	Modulus of Rupture	BSEN 310	17.7 Nmm <sup>2</sup> (across grain) 12.4 Nmm <sup>2</sup> (along grain)
	Modulus of Elasticity	BSEN 310	6503 Nmm <sup>2</sup>
	Impact Strength (Brinell)		34 Nmm <sup>2</sup>
	Vapour Resistance	BSEN 12086:1997	3.8 MNs/g
	Durability	BSEN 12467 : 2012	Category B - PASSED
	Racking Resistance	BSEN 594	Category 1
	Thermal Conductivity at 50°		0.307 w/m <sup>2</sup> /°k
	Fire Test	A1 Euroclass	Class Non-Combustible
	Change in thickness (After immersion in water)	BSEN 317	0 - 0.1% Nmm <sup>2</sup>
Tensile Strength (Perpendicular to plane)	BSEN 319	2.315 Nmm <sup>2</sup>	
Screw Withdrawal Strength	BSEN 320	81.1 N/mm	
Pull through Resistance of Fixings	BSEN 1383:199	1.371 KN	
Average Thickness Swelling	BSEN 321	0	
Average Tensile Strength	BSEN 321	2.72 Nmm <sup>2</sup>	
Moisture Content	BSEN 322	8.6%	
Fire Resistance Steel / Timber Stud	BS 476:Part 20/21:1987	60 minutes	

### DIMENSIONS

Resistant Multi-pro XS is supplied as a rectangular board with square edges and white in colour.

Thickness:	6.5, 9 & 12 mm
Sizes:	1200 x 2400 / 3050 mm 1200 x 2440 mm 1200 x 2700 mm

Special size requirements and thicknesses are also available upon request depending on quantity

### TOLERANCES

Length and Width:	+ / - 2mm
Thickness:	+ / - 0.2mm
Edge Straightness:	1mm / metre
Squareness of edge:	< 3mm






## Technical Data Sheet




Resistant boards should be stored flat, raised from the ground on a pallet, in dry conditions indoors and be under cover. Boards should not be leant upright for long periods of time



Boards should always be lifted by 2 people and not dragged across each other to prevent un-necessary scratching or damage

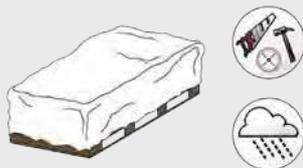

Any moisture allowed to infiltrate between the sheets will cause permanent surface staining. They should be protected from the weather and other trades on site at all times

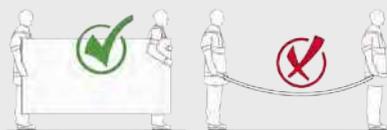

Boards should be carried on edge and extra precaution should be taken to protect the visible front edge and corners

## SUPERIOR ATTRIBUTES

Apart from accepting a variety of painted/polished finishes, Resistant boards provide an excellent compatible surface to a wide range of finishing materials i.e. paints, tiles, veneers, laminates or indeed any finishing option that comes to the creative mind of an architect or interior designer. The acceptance of Resistant in the highly competitive international market stands testimony to its superior attributes



Fire Rated, Non-Flammable, Non-Combustible  
Non-Combustible to BS 476 Part 4  
BS EN ISO 1182 - Euro Class A1



Thermal Insulation Properties  
Provides a high level of thermal movements during hot and cold cycles (Thermal Shock)



Impact Resistant  
An ability to withstand abuse, including surface impact - 34 N/mm



Low Carbon Manufacturing Process  
A natural cured process with a chemical reaction using low levels of heat and a lengthy drying out stage



Moisture & Water Resistant  
Resistant boards will not physically deteriorate when subjected to water or moisture during the construction phase.



Rodent Resistant  
Resistant to rodent infestation like mice, rats and insects



Easy and Fast to work  
Easy and simple to prepare and attach. Rough surface allows application of renders or direct paint / wallpaper



Mould Resistant  
Unlike paper faced/wood based products, does not contain cellulose, limiting mould growth



Breathability  
Ensures a healthy, durable working building with a natural ability to absorb and release moisture



Chemically Stable  
Produced from natural inorganic raw materials, resulting in a strong, durable chemically stable board



Non-Hazardous to health  
Will not cause harm to persons and/or the environment. Produced without asbestos or other inorganic fibres